

# NUTONE

HOOD - FANS



FOOD CENTER



DOOR CHIMES



EXHAUST FANS



BUILT-IN  
BARBECUE



## *Electrical Built-Ins for Homes*

INTERCOM RADIO



ELECTRIC HEATERS



BUILT-IN STEREO



**NUTONE, INC., MADISON AND RED BANK ROADS**

EASTERN SALES.....4003 Empire State Building, 350 5th Ave., New York 1  
MIDWEST SALES.....Old Orchard Arcade, Skokie, Illinois, near Chicago  
WESTERN SALES.....237 West 30th St., Los Angeles 7  
CANADIAN SALES.....5780 Pare St., Montreal 9, Quebec, Canada

● CINCINNATI 27, OHIO ● U.S.A.

SOUTHWEST SALES.....4411 North Central Expressway, Dallas 5  
NORTHWEST SALES.....408 Ninth Ave. North, Seattle 9  
NORTH CALIFORNIA.....308 11th St., San Francisco 3

Copyright 1961 Printed in U.S.A.



# NUTONE

## Hood Fans

Modern convenience in the kitchen

### 3000 Series Selectamatic\* Hood-Fans

SELECT POWER UNIT + SELECT HOOD SIZE + SELECT HOOD FINISH

\* Basic models can be made up into over 100 different Hood-Fan combinations



Model 3061 DeLuxe Power Unit Installed in Hood



Cutaway View DeLuxe Power Unit

Note New DeLuxe Twin-Blower Power Unit not shown




Cutaway View Standard Power Unit



Model 3081 Standard Power Unit Installed in Hood

U.L. Listed and C.S.A. Approved  
Dimension Chart

SIZE	TOP		BACK	
	A	B	C	D
30"	8 $\frac{1}{2}$ "	9 $\frac{1}{2}$ "	8"	9 $\frac{1}{2}$ "
36"	11 $\frac{1}{2}$ "	12 $\frac{1}{2}$ "	11"	12 $\frac{1}{2}$ "
42"	14 $\frac{1}{2}$ "	15 $\frac{1}{2}$ "	14"	15 $\frac{1}{2}$ "
48"	17 $\frac{1}{2}$ "	18 $\frac{1}{2}$ "	17"	18 $\frac{1}{2}$ "

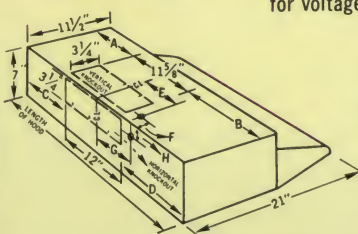

Location of Wiring Knockouts	
E	5 $\frac{1}{2}$ " from center line
F	2 $\frac{1}{2}$ " from back edge
G	5 $\frac{1}{2}$ " from center line
H	1 $\frac{1}{2}$ " from top edge

Exact size of a Hood is  $\frac{1}{8}$ " less than given size.  
A 36" Hood measures 35 $\frac{1}{8}$ "

Distinctive styling with modern "crisp" lines

Interchangeable, Deluxe or Standard Power Units

Prewired "plug-in" power units save installation time

Quiet, powerful "super-suction" exhaust fans whisk away odors, steam, grease

Recessed, non-glare lighting illuminates entire range

Concealed, streamlined power units inside of hood

Matching splash plates for every hood size and finish

Scalloped Trim available in Copper Ribbed Anodized

4 Position Switch for voltage variations

HOODS ONLY Combine with Power Units listed below to make complete Hood-Fan. Transition Duct Incl.			SPLASH PLATES 22" HIGH
Size	Model	Finish	Model
30"	3011	Copper Enamel	SP-1711
	3013	Antique Copper Enamel	SP-1713
	3015	Satin Anodized Aluminum	SP-1715
	3016	Copper Anodized Aluminum	SP-1716
	3018	Stainless Steel	SP-1718
36"	3021	Copper Enamel	SP-1721
	3023	Antique Copper Enamel	SP-1723
	3025	Satin Anodized Aluminum	SP-1725
	3026	Copper Anodized Aluminum	SP-1726
	3028	Stainless Steel	SP-1728
42"	3031	Copper Enamel	SP-1731
	3033	Antique Copper Enamel	SP-1733
	3035	Satin Anodized Aluminum	SP-1735
	3036	Copper Anodized Aluminum	SP-1736
	3038	Stainless Steel	SP-1738
48"	3041	Copper Enamel	SP-1741
	3043	Antique Copper Enamel	SP-1743
	3045	Satin Anodized Aluminum	SP-1745
	3046	Copper Anodized Aluminum	SP-1746
	3048	Stainless Steel	SP-1748
POWER UNITS With Hoods listed above makes complete Hood-Fan. Includes Fan, Light Assembly, Dials for Lights and Fan.			
Model No.	Size	Finish	H.V.I. CERTIFIED
3061	DeLuxe	Copper Enamel	YES
3062		Alum. Enamel	
3081	Standard	Copper Enamel	YES
3082		Alum. Enamel	
3091	DeLuxe Twin Blower	Copper Enamel	YES
3092		Alum. Enamel	
Scalloped Trim Strips— Copper RIBBED Anodized ONLY			
30"	3076-30	36"	3076-36
		42"	3076-42
		48"	3076-48
LIGHT KIT ASSEMBLY For use with above Hoods when used with NuTone Wall Fans. Includes Light Housing Assembly, "on-off" dials for light and fan. (Light bulbs not included.)			
Model 6071 Copper Enamel		Model 6072 Aluminum Enamel	

### 3100 Series Triple-Aire Kitchen Ventilating System



Kitchen Ventilation for Apartments or Remodeling No Ductwork needed  
Use with 3000 Series Hood and 3061, 3062, 3091 or 3092 Power Units


- Filters cooking smoke with a Micro-Flo Filter
- Avoids ozone danger to sensitive nose or throat
- Charcoal Filter shielded from grease to last longer
- Hood reaches all the way to front burners
- De Luxe Power Unit with 4 speed switch
- Attaches to cabinet, wall shelf or in soffit

ONLY NUTONE FILTERS ALL 3!

1. Removes Cooking GREASE with washable Aluminum Filter
2. Removes Cooking SMOKE with Micro-Flo Filter
3. Removes Cooking ODORS with Activated Charcoal Filter

Hood Size	Hood Finishes	Hood Model	Power Unit or	Power Unit	Filter Model
30"	Copper Enamel	3011	3061	3091	3116
	Antique Copper	3013	3061	3091	3116
	Satin Anodized Aluminum	3015	3062	3092	3115
	Copper Anodized Aluminum	3016	3061	3091	3116
	Stainless Steel	3018	3062	3092	3115
36"	Copper Enamel	3021	3061	3091	3126
	Antique Copper	3023	3061	3091	3126
	Satin Anodized Aluminum	3025	3062	3092	3125
	Copper Anodized Aluminum	3026	3061	3091	3126
	Stainless Steel	3028	3062	3092	3125
42"	Copper Enamel	3031	3061	3091	3136
	Antique Copper	3033	3061	3091	3136
	Satin Anodized Aluminum	3035	3062	3092	3135
	Copper Anodized Aluminum	3036	3061	3091	3136
	Stainless Steel	3038	3062	3092	3135

### Home Ventilating Institute — Certified Ratings



All Ventilating Range Hood-Fans which display the H.V.I. Label have been tested by the Texas Engineering Experiment Station at Texas A&M College in accordance with the Standard Test Code approved by H.V.I.

Ventilating Range Hood-Fans which carry this label have been determined by test to meet the requirements of the Minimum Property Standards of the F.H.A. and the minimum requirements recommended by the Home Ventilating Institute.

Static Pressure Point ..... 10 inches W. G.

## 3400 Series Non-Ducted Hood-Fan

Gets rid of GREASE, SMOKE and ODORS,  
the 3 major ventilation problems.


No Ductwork Needed

Hood, Motor and 3 Filter Elements come in one compact unit. Installs in minutes. Aluminum Mesh, Activated Charcoal and a special Micro-Type material purify kitchen air. Gives complete protection needed for walls and furnishings.



U.L. Listed and  
C.S.A. Approved

1. Grease Filter: 261 sq. in. of Aluminum Mesh traps all grease before it can leave the cooking zone.
2. Smoke Filter: Exclusive Micro-Type layer to shield the charcoal Filter and absorb sooty smoke from cooking.
3. Odor Filter: 2 lbs. of air purifying Activated Charcoal literally grabs odors before they can get away.

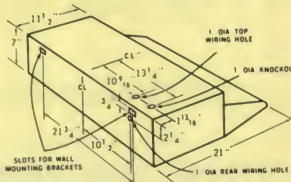


HOOD-FAN			SPLASH PLATES 22" High
Size	Model	Description	Model
30"	3411	Copper Enamel	SP-1711
	3413	Antique Copper Enamel	SP-1713
	3415	Satin Anodized Aluminum	SP-1715
	3416	Copper Anodized Aluminum	SP-1716
	3418	Stainless Steel	SP-1718
36"	3421	Copper Enamel	SP-1721
	3423	Antique Copper Enamel	SP-1723
	3425	Satin Anodized Aluminum	SP-1725
	3426	Copper Anodized Aluminum	SP-1726
	3428	Stainless Steel	SP-1728
42"	3431	Copper Enamel	SP-1731
	3433	Antique Copper Enamel	SP-1733
	3435	Satin Anodized Aluminum	SP-1735
	3436	Copper Anodized Aluminum	SP-1736
	3438	Stainless Steel	SP-1738
48"	3441	Copper Enamel	SP-1741
	3443	Antique Copper Enamel	SP-1743
	3445	Satin Anodized Aluminum	SP-1745
	3446	Copper Anodized Aluminum	SP-1746
	3448	Stainless Steel	SP-1748

BOTH POWER UNITS  
HAVE CUSHIONED  
MOTORS

TRANSITION  
(FURNISHED)  
TO FIT 8 INCH  
ROUND DUCT

## 5000 Series Hood-Fan for Indoor Barbecue and Heavy Duty Ventilation

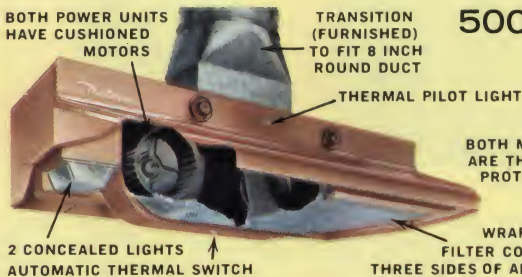

BOTH MOTORS  
ARE THERMAL  
PROTECTED

WRAP-AROUND  
FILTER COVERS ALL  
THREE SIDES OF AIR INTAKE

2 CONCEALED LIGHTS  
AUTOMATIC THERMAL SWITCH

5000 Series Hood-Fan — Includes Hood, two Motors and two Blower Wheels, Filter, built-in Fan and Light Switch, automatic Thermal Switch and Transition Duct to adapt to 8" round duct.			H.V.I. CERTIFIED	Matching Canopy Kit 28½" High	Matching Splash Plates 22" High
Model	Size	Description		Model	Model
5013	30"	Antique Copper Enamel	YES	5063	SP-1713
5016		Copper Anodized		5066	SP-1716
5018		Stainless Steel		5068	SP-1718
5023	36"	Antique Copper Enamel	YES	5073	SP-1723
5026		Copper Anodized		5076	SP-1726
5028		Stainless Steel		5078	SP-1728
5033	42"	Antique Copper Enamel	YES	5083	SP-1733
5036		Copper Anodized		5086	SP-1736
5038		Stainless Steel		5088	SP-1738
5043	48"	Antique Copper Enamel	YES	5093	SP-1743
5046		Copper Anodized		5096	SP-1746
5048		Stainless Steel		5098	SP-1748


This Hood-Fan offers highest effective air delivery of any dual power unit in the entire ventilation field... and yet it's super-quiet because both power units are cushion-mounted.

It's the world's safest Barbecue Hood-Fan because it turns U.L. Listed and on automatically when the C.S.A. Approved cooking heat goes beyond safety level, even if you forget.

It's Double Power\*  
and Super Quiet!

Two Powerful Blowers  
and Cushioned Motors\*

SPECIAL ACCESSORY: Model 846 — Special Wall Cap to be used only with 5000 Series Hood-Fan for vertical-to-horizontal ducting to outside wall. NOTE: The 5000 Series Hood-Fan must be used with 8" diameter duct.

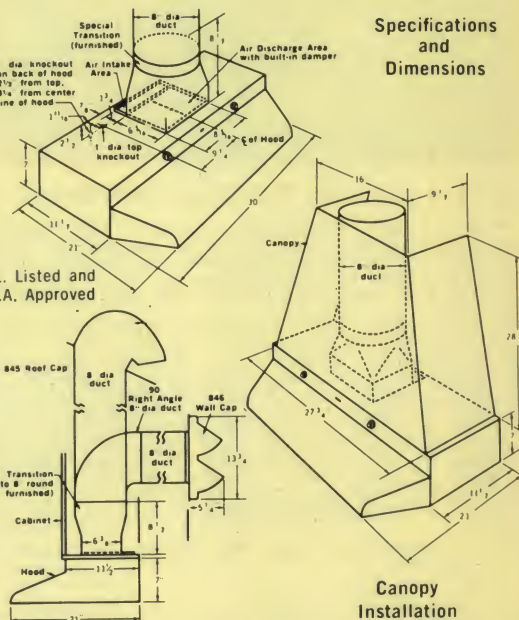

Specifications  
and  
Dimensions

Canopy  
Installation



Includes Hood, Fan and  
Built-in damper and Filter


Four position  
switch for  
power unit

Model	Size	Description	CERTIFIED H.V.I.	Splash Plates
1111	30"	Copper Enamel	YES	SP-1711
1113		Antique Cop. Enamel		SP-1713
1115		Satin Anodized Alum.		SP-1715
1121	36"	Copper Enamel	YES	SP-1721
1123		Antique Cop. Enamel		SP-1723
1125		Satin Anodized Alum.		SP-1725
1131	42"	Copper Enamel	YES	SP-1731
1133		Antique Cop. Enamel		SP-1733
1135		Satin Anodized Alum.		SP-1735

## 1100 Series Jet-Flo Hood-Fan

Factory installed Venturi fan housing attached to top of hood. Hood is prewired to outlet box. No extra wiring needed for plug-in motor. One piece motor mounting brackets for ease of installation. Built-in damper section — powerful pressure type fan and 4 position switch to select the most suitable low speed.

All basic dimensions for Jet-Flo Hood-Fan and the Twin Hood-Fan are identical except for depth of hood.



U.L. Listed and  
C.S.A. Approved

## 1500 Series Twin Hood-Fan

A Peninsular Hood-Fan — installed above ranges in "L" plan or peninsular cabinets. Hood has two "faces" which provide additional area for catching cooking greases, odors, and excess heat. Factory installed fan housing for Jet-Flo fan. Hood is prewired to outlet box. Has one piece motor mounting brackets. Has powerful pressure type fan and 4 position switch to select the most suitable low speed.


Model	Size	Description	H.V.I. CERTIFIED
1521	36"	Copper Enamel	YES
1525		Satin Anodized	
1526		Copper Anodized	
1531	42"	Copper Enamel	YES
1535		Satin Anodized	
1536		Copper Anodized	

Includes Hood, Fan and Built-in damper and Filter.

U.L. Listed and C.S.A. Approved.

## "Fold-away" OVEN HOOD-FAN

does not disturb baking temperatures.

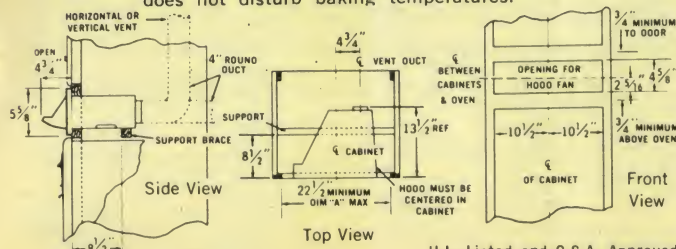

U.L. Listed and C.S.A. Approved

Fits flush with cabinet when not in use. Fan automatically starts when Hood is pulled to "open" position. Protects cabinets from heat, grease and smoke which escape from built-in oven when door is opened. Filter and Fan easily for cleaning. Includes, Filter and Fan

Size	Description	Model
24"	Antique Copper Enamel	3202
	Stainless Steel	3208
27"	Antique Copper Enamel	3213
	Stainless Steel	3218
32"	Antique Copper Enamel	3223
	Stainless Steel	3228
Power Unit • Fits above Hoods to make complete Oven Hood-Fan		3260





# NUTONE

## Exhaust Fans

for a fresh, clean odor-free kitchen

U.L. Listed and C.S.A. Approved




### 8" Pull Chain Wall Fan 10"

Installs in wood or brick walls. Sturdy venturi housing for greater air delivery at reduced noise level. Has weather-tight shutter outside the house with 13 3/4" square wall plate. The housing, "snap-in" motor and blade assembly, and grille are packed in one carton. One piece grille installs with single thumb screw. Has easy to install "plug-in" motor.

Model No.	Blade Size	Grille Finish and Size	Wall Thickness	H.V.I. CERTIFIED in square feet		
				Kitchen	Bath	Other
8000	8"	White 11" Sq.	5" To 10 1/8"	125	Over 200	325
8020	8"	White 11" Sq.	9" To 14 1/8"	125	Over 200	325
8040	8"	White 11" Sq.	3 5/8" To 6 1/4"	125	Over 200	325
8010	8"	Anod. Alum. 11" Sq.	5" To 10 1/8"	125	Over 200	325
8030	8"	Anod. Alum. 11" Sq.	9" To 14 1/8"	125	Over 200	325
8050	8"	Anod. Alum. 11" Sq.	3 5/8" To 6 1/4"	125	Over 200	325
8110	10"	Anod. Alum. 13 1/2" Sq.	5" To 10 1/8"	250	Over 200	Over 500
8130	10"	Anod. Alum. 13 1/2" Sq.	9" To 14"	250	Over 200	Over 500

Note: 8" Models fit 9 1/8" dia. wall opening. 10" Models fit 11 1/8" dia. wall opening.



NuTone Motors Guaranteed for 5 Years



### 8" Ceiling or Inside Wall Fans 10"


Venturi housing for greater air delivery at reduced noise level is 3 3/8" deep, fits 2" x 4" construction. Has "snap-in" motor and pressure type blade assembly. Fits standard 3 1/4" x 10" duct. Mounts between 16" C.C.\* joists or studding. Housing, motor and blade assembly and grille packed in one carton. One piece grille installs with single thumb screw. Has easy to install "plug-in" motor.

Model	Blade Size	Grille Finish and Size	H.V.I. CERTIFIED in square feet		
			Kitchen	Bath	Other
8310	8"	Anod. Alum. — 11" dia.	80	150	200
8510	10"	Anod. Alum. — 13 1/2" dia.	150	Over 200	375

NOTE: 8" Fan uses Model 834 Filter (extra). 10" Fan uses Model 854 Filter (extra).

Both Fans use Model 860 Three Speed Switch (extra).

\* Model 8310 includes hanger bars.

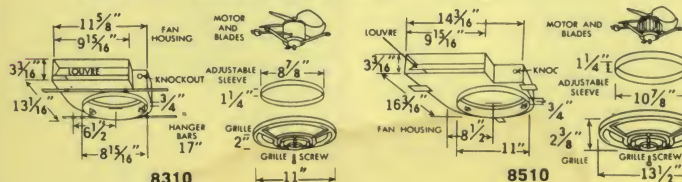

### 8" Automatic Wall Fans 10"

Installs in wood or brick walls. Sturdy venturi housing for greater air delivery at reduced noise level. Automatic weather protecting hood with patented\* flutter proof shutter. 13 3/4" sq. wall plate is outside the house. "Snap-in" motor and blade assembly, and grille packed in one carton. One piece grille installs with single thumb screw. Has "plug-in" motor.


\* U. S. Pat. No. 2,800,853

Model No.	Blade Size	Grille Finish and Size	Wall Thickness	H.V.I. CERTIFIED in square feet		
				Kitchen	Bath	Other
8060	8"	White 11" Sq.	5" To 10"	80	150	200
8080	8"	White 11" Sq.	9" To 14"	80	150	200
8070	8"	Anod. Alum. 11" Sq.	5" To 10"	80	150	200
8090	8"	Anod. Alum. 11" Sq.	9" To 14"	80	150	200
8170	10"	Anod. Alum. 13 1/2" Sq.	5" To 10"	125	Over 200	325
8190	10"	Anod. Alum. 13 1/2" Sq.	9" To 14"	125	Over 200	325

NOTE: 8" Models fit 9 1/8" dia. wall opening. 10" Models fit 11 1/8" dia. wall opening.

8" Models use Model 834 Filter. 10" Models use Model 854 Filter.

8" Models use Model 861 Three Speed Switch. 10" Models use Model 860 Three Speed Switch.



### Vertical Discharge Fans 10"


Installs in ceiling for ventilating to the roof. "Snap-in" motor and blade assembly with hanger bars (included) installs between 16" C.C. joists. Housing, motor and blade assembly and grille packed in one carton. One piece grille installs with single thumb screw. Has easy to install "plug-in" motor. Anodized Grilles Guaranteed

\* Model 8220 has motor mounting bracket with keyhole slots.

Model	Size	Filter (extra)	Grille Size	Ceiling Opening	Duct Size	H.V.I. CERTIFIED in square feet		
						Kitchen	Bath	Other
8200	---	# 834	11" dia.	9 1/8" dia.	7" dia.	125	Over 200	325
8210	---	# 834	11" dia.	9 1/8" dia.	7" dia.	100	185	250
8220	8"	# 834	10 1/2" sq.	9 1/8" dia.	8" dia.	80	150	200
8490	10"	# 854	13 1/2" dia.	11" dia.	8" dia.	125	Over 200	325

NOTE: Model 8210 includes built-in damper. Model 8490 includes built-in reducer with damper.

Model 895 Damper Section for Model 8200 available (extra). Fits 7" diameter duct.

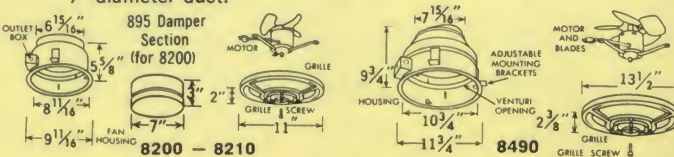

# NUTONE

## Exhaust Fans

For bathroom, laundry and family rooms

U.L. Listed and C.S.A. Approved




### Twin Blower Model 8700

For installation in kitchen cabinets on inside wall or outside wall. Also for duo-level installation in ceiling or soffit.

\*For installation in cabinets; includes cabinet mounting kit and filter. Use Model 860 Three Speed Switch.

Model No.	Grille Finish	H.V.I. CERTIFIED in square feet		
		Kitchen	Bath	Other
8700	Anod. Alum.	100	185	250
8720*	Anod. Alum.	100	185	250
8710	Copper Anod.	100	185	250
8730*	Copper Anod.	100	185	250




U.S. Pat. Nos. 2,300,504; 447,586; 519,112; 2,842,307; 2,856,836

### Bathroom Fan Model 8810

Designed especially for Bathroom use where closed doors require a fan with high static pull. Discharges to outside through 4" diameter duct. Has adjustable bracket... no blocking from joists. Snap-in mounting. Moistureproof motor resists bathroom moisture. Use Model 862 60-Minute Time Switch.

Model No.	Grille Finish	H.V.I. CERTIFIED in square feet		
		Kitchen	Bath	Other
8810	Anod. Alum.	Not used	75	100

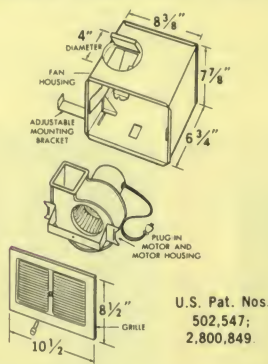


U.S. Pat. Nos.  
502,547;  
2,800,849

### Bathroom Fan Model 8830

#### for Ceiling or Inside Wall

Designed especially for Bathroom use where closed doors require a fan with high static pulls. For all types of bathrooms. Less than 4" thin-fits in ceiling or between 2" x 4" studs. Discharges to outside through 3" dia. duct. Meets FHA requirements. Use Model 862 60-minute Time Switch.

Model No.	Grille Finish	H.V.I. CERTIFIED in square feet		
		Kitchen	Bath	Other
8830	Anod. Alum.	Not used	65	90




### Vent-A-Lite® Model 8660

#### Exhaust Fan plus Light

Both for the cost of one combination unit. Blower is quiet — moves just the right amount of air — no drafts. It's Round — provides better lighting — installs between 2 x 6 joists. Hinged lens for 100 watt bulb replacement. Overall depth below ceiling 2 1/8". Includes 2 hanger bars. Discharges through 4" dia. duct.

Model No.	Grille Finish	H.V.I. CERTIFIED in square feet		
		Kitchen	Bath	Other
8660	Anod. Alum.	Not used	75	100



Nutone Motors Guaranteed for 5 Years



All ventilating fans which display the H.V.I. Label have been tested by the Texas Engineering Experiment Station at Texas A&M College, in accordance with the Standard Test Code, approved by H.V.I.

### Home Ventilating Institute — Certified Ratings

The room rating — by square foot method has been applied in accordance with F.H.A. and H.V.I. specifications. Performance of the particular fan at appropriate static pressure points is determined by the aforementioned Independent test facility.

ROOM	RECOMMENDED AIR CHANGES PER HOUR	Static Pressure Points —
Kitchen	15	Duct Connected Fans ..... .10 inches W.G.
Bathroom	8	Direct Discharge
Family, Laundry, or Recreation Room	6	Wall Fans ..... .03 inches W.G.

## NUTONE VENTILATION ACCESSORIES

Model	Description	Model	Description	Model	Description
823	Reducer with damper. Use with 8220 to adapt to 8" round duct	845	Roof cap with weather damper. For duct size up to 10" square	885	Wall Cap with weather louver. For use with 4" round duct.
824	Transition Elbow with damper. Use with 8220 for 90° turn to 3 1/4 X 10" duct size	846	Special wall cap for 5000 Series Hood-Fan	886	Transition — 7" round to 3 1/4" x 10"
834	Filter for 8060-8200-8210-8220-8310	854	Filter for 8170-8190-8490-8510 fans	887	7" round duct 18" long
836	Eave cap. Has weather louver. Use to terminate 3 1/4 X 10" duct.	860	3-Speed Switch for 8170-8190-8310-8490-8510 and 8700-8710	888	Flat Elbow for 90° turn. For use with 3 1/4 X 10" duct.
837	Flush Wall Cap. Has weather louver. Use to terminate 3 1/4 X 10" duct.	861	3-Speed Switch. For 8060-8090	889	3 1/4 X 10" duct. Each section 24" long. 5 sections.
838	Wall Cap. Has weather louver. Use to terminate 3 1/4 X 10" duct.	862	60 Minute Time Switch for use with 8660, 8810, 8830, 9200, 9280 and 9290 Heaters	890	Duct, 7" round. Each section 24" long. 5 sections.
839	Elbow 90° turn. For use with 3 1/4 X 10" duct	874	3 1/4 X 10" duct. 18" long.	894	Transition Elbow with damper. Use with 8200-8210 for 90° turn to 3 1/4 X 10" duct size.
840	Adjustable Elbow for use with 4" round duct	875	Installation Kit for installing 8700-8710 in cabinets.	895	Damper Section for 8200
841	Roof Cap for 4" diameter duct. For use with 9300, 8660, 8810, 8830, 9090, 9110 and 3260	876	Damper section 7" long. For use with 3 1/4 X 10" duct.	897	Transition Elbow 90° 4" X 12" to 3 1/4 X 10"
		877	Transition 6" round to 3 1/4 X 10"		Use with 3000 Series Hood-Fans
		879	Filter for 8700-8710	898	Right Reverse Elbow. For use with 3 1/4 X 10" duct.
				899	Left Reverse Elbow. For use with 3 1/4 X 10" duct.
				1000	Duct. 8" round X 18" long. For use with 8220

# NuTONE

## Door Chimes

... a "cheerful earful"  
all through the house

Brilliantly designed in Contemporary and Traditional models to suit any interior. 25 handsome styles ranging from low cost two-note chimes . . . to exquisite eight-note Westminster-chord masterpieces.

\*NuTone "Lifetime" Finishes Will Not Rust or Tarnish



L-12 "Champion"—Plastic cover, White and Silver\* or Ivory and Gold\*. 2 notes front door, 1 note rear door 7½" x 4¾". Weight 1 lb. 7 oz. Copper finish cover also available



L-16 "Harmony" — Plastic cover, White and Silver\* or Ivory and Gold\*. 2 notes front door, 1 note rear door. 7" x 7½" x 2¾". Weight 2 lbs.



L-17 "Decorator" — Desert Sand finish cover and brass grille. Two notes for front door, one note for rear. 4¾" x 7¾" x 2¾". Wt. 1¾ lbs.



L-20 "Mt. Vernon"—Gold\* Antique Hammered finish Colonial design. 2 notes for front door, one note for rear door. 7" x 11¾". Wt. 2½ lbs.



L-21 "Rythmatic" — White and Silver Anodized\* or Ivory and Gold Anodized\* Repeating Chime front door, 2 notes for rear door, one note for third door. 6¾" x 7¾" x 2¾". Wt. 2 lbs.



L-22 "Jewel"—Lime Oak or Walnut finish cover with Gold\* tubes. Two notes front door, 1 note for rear door. 7" x 9" x 3". Wt. 2 lbs. 3 oz.



L-23 "Mayfair" — Lime Oak or Walnut finish cover with Gold\* tubes. Two notes front door, 1 note rear. 7¾" x 11¾" x 3". Wt. 2 lbs. 2 oz.




L-30 "Chord Tone"—Desert Sand finish cover. Smart grille pattern with gold flecked grille cloth. 2 notes chord tone front door, 1 note rear door. 7½" x 9½" x 2¾". Wt. 3 lbs. 10 oz.



L-32 "Provincial" — White or Walnut and Gold\* cover with antique high-lighted grille. 2 notes chord tone front door, 1 note rear door. 8¼" x 10" x 3¾". Wt. 3¾ lbs.



L-38 "Chorale"—Walnut or Desert Sand and Gold Anodized\*. 8 or 4 notes front door, 1 note rear door, different note for third door. 7¾" x 14½" x 3½". Wt. 6½ lbs. Trans. included.



L-39 "Golden Eight" — Lime Oak or Walnut finish cover. 8 or 4 notes front door, one note for rear door, different note for third door. 11¼" x 7¾" x 3¾" deep. Wt. 5¼ lbs. Use NuTone 301 OB Transformer.



L-60 "Sunburst" — 8 or 4 chord Chime and Clock. Light Walnut or Ebony finish. Brass sunburst and bezel. 1 chord rear door, different chord third door. Transformer incl. 12¼" x 8¾" x 3½". Wt. 10 lbs. 10 oz.



L-14 "Built-In" — Ivory finish cover. May be painted to match walls. 2 notes front door, 1 note rear door. 5¾" x 7¾" x 1¾" deep. Cutout 4½" x 6¼". Wt. 2 lbs.



L-15 "Built-In"—Silver Anodized\* and White or Gold Anodized\* and Ivory. 2 notes for front door, one note rear. 7¾" square x 2" deep. Cutout 6¾" square. Wt. 2 lbs. 12 oz.



L-36 Built-In "Elite" — Chord Chime and Clock. Gold, Silver or Copper Anodized\*. 2 notes chord tone front door, 1 note rear door. Cover 7¾" square. Box 6¾" sq. x 3¼" deep. Wt. 4 lbs. 5 oz.



L-70



L-71



L-72

## ELECTRONIC DOOR CHIME

All NuTone Electronic Chimes connect with NuTone Stereo-Intercom or Intercom-Radio Systems . . . Relay chime tones into rooms with speakers. Have volume control. Can be heard above music or intercom in all rooms. Even sound clearly when Stereo or Intercom system is turned off. Electronic mechanism permanently installed in cabinet or housing. Transformer included with each chime.

### L-70 Surface Mounted "Electronic"

Adjustable for 8 or 4 notes at front door, one note rear door, different note for 3rd door. Walnut or Lime Oak finish cover — Gold Anodized Grille. 7 $\frac{3}{4}$ " x 11 $\frac{1}{4}$ " x 3 $\frac{3}{8}$ ".

### L-71 "Electronic Built-In"


Sounds 2 notes for the front door, one note for rear door. Gold\* Anodized and Ivory or Silver\* Anodized and White. May be painted to match walls. Grille 8" sq. Housing 2" dp.

### L-72 "Electronic Built-In Deluxe"

Adjustable for 8 or 4 notes for the front door, 1 note for rear door, different note for 3rd door. Has Walnut finish frame, gold flecked grille cloth and Gold\* Anodized panel with control knobs . . . matches NuTone Stereo-Intercom system speakers. 9" wide, 10 $\frac{1}{2}$ " high. Cut-out 7 $\frac{1}{8}$ " wide, 9 $\frac{1}{8}$ " high. Housing 3 $\frac{3}{8}$ " deep.



L-26 "Regal"

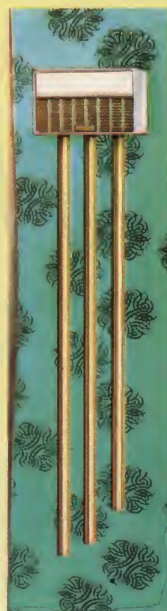

L-33 "Coronet"



L-42 "Supreme"



L-46 "Jefferson"



L-49 "Century"

**L-26** — Ivory and Gold finish cover with satin brass tubes. 2 notes front door, one note rear door. 7" x 39 $\frac{3}{4}$ " long x 3" deep.

**L-33** — Walnut or Lime Oak finish cover. Three satin brass tubes. 2 notes front door, one note rear. 8 $\frac{1}{2}$ " x 41 $\frac{7}{8}$ " long x 2 $\frac{7}{8}$ ".

**L-42** — Lime Oak or Ebony finish, satin brass tubes. Selector switch for 8 or 4 notes for front door, 1 note rear, different note third door. Trans. incl. 10 $\frac{3}{8}$ " x 5" x 48 $\frac{1}{2}$ ".

**L-46** — Colonial wallclock and chime with Mahogany cabinet. Selector switch for 8 or 4 notes for front door, 1 note rear, different note third door. Trans. incl. 11" wide x 6" x 56 $\frac{1}{8}$ ".

**L-49** — Wall Clock and door chime. Lime Oak or Ebony finish cover. Selector switch for 8 or 4 note for front door, 1 note rear, different note third door. Trans. incl. 10 $\frac{3}{8}$ " x 5" x 49 $\frac{5}{8}$ " long.

Use NuTone 101-OB 16 Volt Transformers for L-26 and L-33

Models L-42, L-46, L-49 and L-70 have volume control selector switch.



## MC-309 "Pre-Vue" Non-electric 2 Note Door Chime with Optical Lens Viewer.

Wide angle lens offers clear view of entire doorway area. Complete privacy for viewer. Gold\* Anodized double window nameplate with charcoal plastic push button outside. Smartly styled Oyster White or Walnut finish cover inside. Chime cover: 1 $\frac{5}{8}$ " x 3 $\frac{1}{8}$ " x 7 $\frac{3}{8}$ ". Nameplate 3 $\frac{1}{4}$ " x 2 $\frac{3}{4}$ " x 4 $\frac{3}{8}$ ". Fits all doors 3 $\frac{1}{4}$ " to 2" thick.



## MC-304 "Greeter" 2 Note Non-Electric Door Chime

Gold\* or Silver\* Anodized nameplate with charcoal plastic push button outside. Smartly designed Oyster White or Walnut Finish cover inside. Fits all doors 3 $\frac{1}{4}$ " to 3" thick. Chime cover 1 $\frac{5}{8}$ " x 3 $\frac{1}{8}$ " x 7 $\frac{3}{8}$ ". Nameplate 3 $\frac{1}{4}$ " x 2 $\frac{3}{4}$ " x 3 $\frac{1}{4}$ ".

With Extension Shaft, EX-311, fits door to 9" thick.

NuTone Chimes and Transformers are Manufactured under one or more of the following U.S. Patents: 2,293,671; 2,330,439; 2,404,439; 2,408,712; 2,466,640; 2,542,947; 2,559,334; 2,659,074; 2,665,544; 2,386,738; D-180,189; D-180,406; D-180,518; 2,799,018; 2,810,123; 2,819,331. Other Patents Pending.

## NuTone *Sculptured* Pushbuttons

\*NuTone Anodized Push Buttons will not rust or tarnish



PB-1 Gold\* or Silver



PB-2 Gold\*



PB-3 Gold\* or Silver\*



PB-4 Gold\*



PB-5 Gold\*



PB-6 Gold\* or Silver



†PB-18 Gold\* or Silver\*

PB-8 Gold

PB-10 Gold\* or Silver\*



PB-11 Gold\*



PB-12 Walnut and Ivory



PB-14 Gold\*



PB-15 Bronze



PB-16 Hammered Finish



PB-17 Gold\* or Silver\*



PB-21 Gold\*



Transformers

†Fits anywhere standard NuTone PB-1 fits

## NUTONE LOW VOLTAGE TRANSFORMERS

\*Lifetime Guarantee

**Style 515-OB** . . . 10-Volt 5 Watt . . . Powerful enough for chimes in small homes. Mounts any place. Mounting feet for open wiring. Fits any 7/8" "knockout". Single screw bracket for quick mounting. Has thermal cutout. U. S. Patent No. 2,819,331

**Style 101-OB** . . . 16 Volts (10) (VA). Mounts any place. Can take substantial surge loads. 16 volts for 2-Note Chimes also for oil and gas heating systems of air conditioning units. Has thermal cutout. U. S. Pat. 2,819,331.

**Style 301-OB** . . . 16 Volts (30 VA) . . . Mounts any place. For use on Multiple chime installations. Can also be used for oil and gas heating systems, or air conditioning units. Has thermal cutout.

**Style 201-OB** . . . 24 Volts (20 VA) . . . For higher loads. Mounts any place, also for oil and gas heating systems or air conditioning units. Has thermal cutout.

**Style 320** . . . 8-16-24 Volt Trivolt . . . All purpose, low voltage Transformer with thermal cutout. Guaranteed against burnout!

NuTone Transformers are U.L. Approved and CSA listed.

"ALL NUTONE TRANSFORMERS HAVE A "LIFE-TIME" GUARANTEE—BECAUSE THEY CONTAIN A SPECIAL BI-METAL THERMAL CUTOUT — FOR PROTECTION AGAINST OVERLOAD OR SHORT CIRCUIT"



# NU-TONE

## Built-In Stereo

Intercom — AM • FM Radio  
High Fidelity Music System

U.L. Listed

Now you can enjoy STEREO MUSIC throughout your entire home . . not just in a single room. You can virtually custom-build your own NuTone Stereo System to suit your own taste . . every inch of it built-in to standard (2 x 4) walls to save space and money!

### Now . . A Stereo Music System All Through the House



**AM-FM RADIO TUNER  
FOR STEREO RADIO**

High Fidelity AM and FM Radio in a single chassis. Permits use of one Speaker System for an AM program, the other for an FM program, simultaneously. Also for Stereo Radio broadcasts. Solid Walnut frame. Gold anodized control and dial panels. Input plugs for auxiliary equipment. 15 $\frac{3}{4}$ " wide, 11" high, 4" deep. **Model No. 2402**



**DUAL-CHANNEL AMPLIFIER  
COMBINED WITH INTERCOM**

Two amplifiers in a single chassis, with common controls. Loudness, Balance, Treble and Bass Controls insure perfect Stereo and monaural reception. Also room-to-room Intercom. Hand-rubbed Walnut frame, Gold Anodized Control Panel. 15 $\frac{3}{4}$ " wide, 11" high, 4" deep. **Model No. 2401**

NuTone Built-In Stereo System speakers and components cannot be used with the NuTone Intercom-Radio System.



**"FOLD-AWAY" RECORD STORAGE CABINET**

Matches the "Fold-Away" Record Changer. Protects up to 40 records against loss and breakage. Wired to hold tape player-recorder available soon. Walnut frame. Vinyl covered steel door. 15 $\frac{3}{4}$ " square, 4" deep. **Model No. 2404**



**"FOLD-AWAY" STEREO RECORD CHANGER**

Plays all speeds of Stereo and conventional records. Intermixes 10" and 12" records of the same speed. Diamond stylus for Stereo and LPs; sapphire stylus for 78 RPMs. Last record can automatically shut off entire System. Input plug for auxiliary equipment. 15 $\frac{3}{4}$ " square, 4" deep. **Model No. 2403**

### A NEW 4-WAY STEREO SYSTEM

1. Dual-Channel Stereo Amplifier plus a room-to-room intercom.
2. An AM-FM Radio Tuner to receive Stereo Radio programs.
3. Fold-in Wall Record Changer. Automatic shut-off and 4-speeds.
4. Wall Cabinet for Record Storage or Tape Deck



**STEREO SPEAKERS  
BUILT IN WALL**

The NuTone speakers are built into your walls for the finest tone. Better tone than cabinets which cannot match built-in wall enclosures for rigidity and size.

Walnut frames. All-Saran, non-tarnishable grille cloth. 12 $\frac{7}{8}$ " square.

Speaker with Controls: **Model 2411**

Speaker without Controls: **Model 2412**

Door Speaker Model. 2413

Housing sealed against moisture; weatherproof, plastic speaker-cone; concave design for maximum "pick-up" of normal voice. Mounts in wall, ceiling or soffit. (not shown)

not shown

Inside Remote Control Model 2416

Outside Remote Control Model 2415

Patio Speaker without Controls

**Model 2414**

**FOR THE FIRST TIME — A Stereo AM-FM Radio-High-Fidelity Music System combined with Intercom, — built-in — complete and ready to enjoy — not just in one room, but throughout the home, and in the Patio. Today's most wanted music — on Stereo records, in Stereo broadcasts, and on Stereo Tape. Now — all of these sensational Stereo sources — built-in.**

**SAVES FLOOR SPACE—AVOIDS CABINET-CLUTTER.** No costly console cabinets: One set of built-in matched components uses built-in remote wall-speakers, inside and outside the home. There is a system to suit every plan and budget.

**PRECISION ENGINEERED — and decorator-styled — values found only in the finest electronic equipment.**

• See Door Chime Section for Electronic Chimes to be used with NuTone Stereo Systems.

# NU TONE

## Intercom Radio

a home broadcasting network  
for your protection and pleasure

U.S. Pat. No. D-184,548

U.S. Pat. No. D-184,549



**AM-FM DELUXE  
Model 2016**  
Copper Anodized Aluminum  
with Anodized Grille

**AM-FM DELUXE MODEL 2015**  
Satin Anodized Aluminum  
with Anodized Grille

Fit 4" thick wall.

### AM-FM DELUXE

Includes Master Control Station, 3 Inside Remotes, 1 Outside Remote, All wire and antennae wire.  
Additional Remotes and Speakers are available (extra).

### AM STANDARD

Includes Master Control Station, 3 Inside Remotes, 1 Outside Remote, All wire and antennae wire.  
Additional Remotes and Speakers are available (extra).



**AM STANDARD  
Model 2012**  
Baked Aluminum Enamel  
with Anodized Grille

**AM STANDARD MODEL 2011**  
Baked Copper Enamel  
with Anodized Grille

Fit 4" thick wall.

#### SPECIFICATIONS

TUBES: Seven tubes plus Silicon Rectifier. 1-12BE6; 2-12BA6; 1-19T8; 1-ECC81/12AT7; 1-50C5 and 1-12AV6. F.M. RADIATION SPECIFICATIONS: Shielded to meet FCC radiation specifications. RADIO: AM broadcast range is 540 to 1650 Kilocycles. FM range is 88 to 108 Megacycles. SPEAKER: 4 x 6 oval, 3.2 OHM, Alnico V Magnet. PHONO-JACK connections. PILOT LIGHT: Two incandescent bulbs illuminate the dial and show when set is turned on. POWER CONSUMPTION: 42 watts, 117 volts. TONE CONTROL: The tone control affects radio and phono only. Since intercom tone is critical the circuit is arranged so that it is always correct. 8 STATION SELECTOR SWITCHES.

#### SPECIFICATIONS

Six tubes, 1-12BE6; 2-12AV6; 1-35C5; 1-35W4. 1-12BA6, AM broadcast range 540-1650 KC. SPEAKER: 4" round, 3.2 OHM; PHONO-JACK Connections. PILOT LIGHT: Clear neon marker tells when set is on and acts as tuning marker. POWER CONSUMPTION: 30 watts 117 volts. 8 STATION SELECTOR SWITCHES.

#### DeLuxe and Standard Sets

Complete unit in two cartons; the "A" carton contains all roughing-in material and wire; the "B" carton contains the master chassis and the remote speaker assemblies. Either section can be bought separately.

NuTone Intercom-Radio speakers and components cannot be used with the NuTone Built-In Stereo System.

#### FINEST INTERCOM FIDELITY

FULL TIME INTERCOM

AUTOMATIC ACOUSTIC  
LEVEL FOR INTERCOM

VARIABLE CONTROLS


9 PRIMARY STATIONS AVAILABLE

CHOICE OF AM and FM

ONE SETTING AT MASTER

Model	Description
2011	AM Standard, Copper Enamel
2012	AM Standard, Aluminum Enamel
2015	AM-FM Deluxe—Satin Anodized Aluminum
2016	AM-FM Deluxe—Copper Anodized
2005	Extra Outside Remote—Gold Anodized
2020	Hi-Fidelity Accessory Speaker (Inside)
2020	Hi-Fidelity Accessory Speaker (Outside)
2024	Extra Inside Remote—Desert Sand
2040	200 Feet 3-Conductor Wire
2042	1000 Feet Reel 3-Conductor Wire

See Chime page for Electronic Chimes to be used with NuTone Stereo and NuTone Intercom Systems.

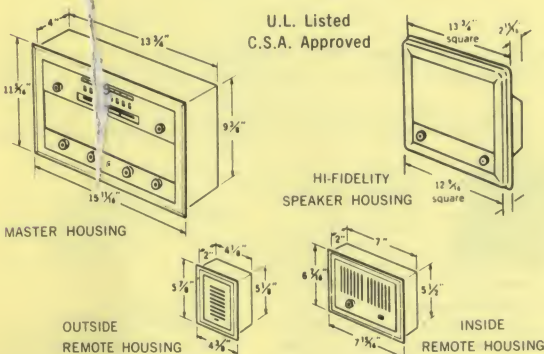

**HI-FIDELITY SPEAKER . . .** A high fidelity 8" coaxial speaker for the utmost enjoyment from intercom music. Use as many of these speakers as you wish—up to the maximum number of remotes possible with your intercom system. Includes rotary "Talk-Listen" and Volume Controls, and a shut-off feature for privacy. Desert Sand weather-proof housing, Gold Anodized control panel.



**INSIDE REMOTES . . .** are Desert Sand color. Can be painted to match color of wall if desired. Have variable rotary controls with privacy setting to prevent eaves-dropping.

**OUTSIDE REMOTES . . .** Slide switch control for TWO-WAY conversation, to and from inside remotes or master control. Gold anodized grille weatherproof . . . Can't tarnish.



# NuTONE

## Built-In Barbecue

Electric and Charcoal Models



U.L. Listed


### Model 4000 Built-In ELECTRIC Barbecue

No flavor like Barbecue . . .  
No Barbecue like NuTone!

For Kitchen, Family Room or any Sheltered Area  
"Cook-outs" . . . inside the home year 'round . . . rain or shine

- Channel-Grids drain grease into removable tray.
- All parts removable for easy cleaning.
- Hinged cover retains heat, saves electricity.
- Rotisserie plugs right into the unit. No cords.
- Aluminum mesh prevents scorch and flare-up.
- Dual Heat-Elements — "triple-position" switch.
- Anodized Aluminum front panel keeps "New" look.


IT "DROPS-IN" TO STANDARD CABINETS . . . Simply make a cut-out in any standard kitchen counter . . . the unit drops into place and locks in position with tension braces. Completely insulated.

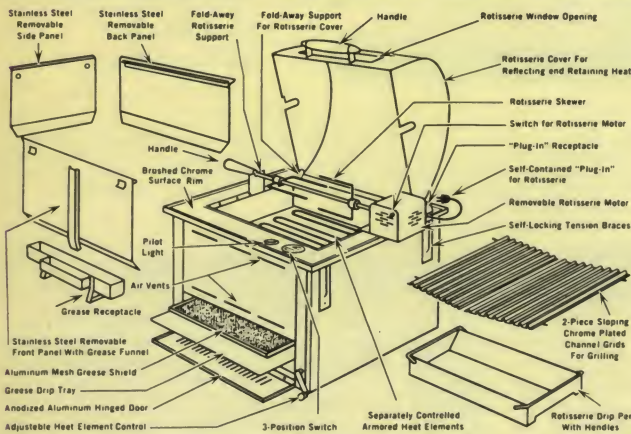

### Easiest to Install . . DROPS IN to standard kitchen cabinets

#### Built-In Barbecue Grille

No muss . . . no fuss . . . everything is neat and tidy. Brushed chrome counter rim is flush. Two-piece patented channel grids . . . prevent dangerous "flare-ups" by diverting the melted grease away from the blazing heat. Flavor of meat is improved because you avoid the "sooty taste."

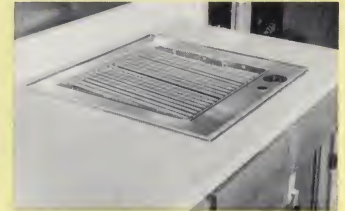

#### Plus Rotisserie

Easy and quick to assemble. The anodized cover keeps your room cooler by preventing excess heat from escaping. Most important . . . it retains and reflects the radiating heat to reduce cooking time . . . saves 1/2 to 3/4 on electricity costs of ordinary rotisseries.




U.S. and Foreign Patents Pending

### Model 4000 Built-In ELECTRIC Barbecue

Drop-in unit for cabinet mounting. (Fits 27" and 30" sink or range cabinets.) Fully insulated. Includes channel grids, grease receptacle, grease drip tray, aluminum mesh grease shield, stainless steel removable side panels, 3-position switch for heat control — plug-in receptacle and fold-away support for rotisserie attachments (Model 4020). 3200 Watts, 220 Volt.

#### Model 4020 Rotisserie Attachments

Includes motor, cover, skewer and aluminum grease pan. For Models 4000 and 4010.

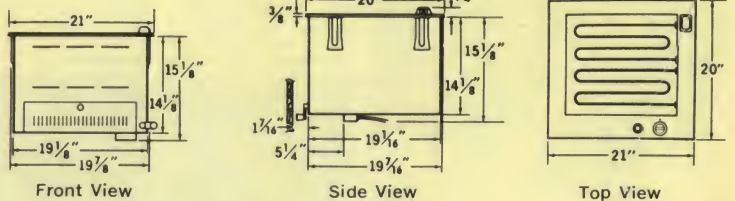

# 4000 Cutout Dimensions for Counter Top Installation: 19 7/8" wide x 19 3/8" long x 14 1/8" deep  
# 4000 Rough-in Dimensions for Masonry Installation: 19 7/8" wide x 19 1/8" long x 14 1/8" deep

### Built-In CHARCOAL Barbecue Model 4010

Has many of the same exclusive features offered in NuTone's electric model . . . WITH THE EXCEPTION THAT CHARCOAL IS USED AS THE SOURCE OF HEAT. Temperature is controlled by a heat control lever which raises and lowers the fire box.

Anodized Aluminum Front Panel with Brushed Chrome Top Plate. Includes Channel Grids, Grease Receptacle, warp-proof Fire Pan with fuel saving divider, Lift Lever for heat control, removable Stainless Aluminum panels — fold-away support for Rotisserie Attachments. 4010 not insulated)

When Model 4010 is used indoors, it must be vented according to your local and national building codes.




#### Model 4021 CHARCOAL FIRE PAN For Replacement

NuTone's Model 4021 warp-resistant fire box has "easy-to-carry" handles on each side which fold down and out of the way when it is inserted in the grill.

MODEL 4022 INSULATION BOX for use with model 4010 Charcoal Barbecue when installed in cabinets.



MODEL 4023 COUNTER-TOP TRAY Heavy anodized aluminum with black handles . . . for serving barbecue foods.

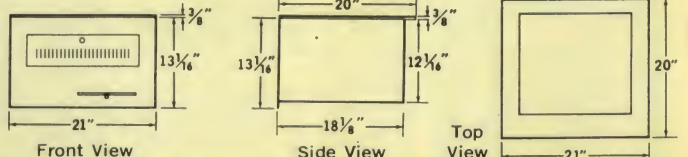

# 4010 Rough-in Dimensions for Masonry Installation: 16 3/4" wide x 18 3/4" long x 12 1/2" deep — Rough-in Dimensions using # 4022 Insulation Kit: 19 3/4" wide x 19 3/4" long x 12 3/4" deep





# NU-TONE

## *Built-In Food Center*

U.L. Listed  
C.S.A. Approved

**The only Food Preparation Center of its kind. Built into any kitchen counter top. Saves Work-Space and Saves Money**

### One Motor operates 6 Built-In Appliances

#### 1 — Blender

Delicious frosty drinks, salads and soups. Six Speeds. Safety seated blades. Triangular shape for faster liquefying, shredding and blending.

#### 4 — Grinder

You've never tasted hamburger like this. Exclusive vertical design retains all nourishing natural meat juices. No mashing or splattering.

#### 2 — Shredder

**NEW VEGETABLE SHREDDER and SLICER.** For tasty salads chips and soups rich in vitamins. 3 cutting plates... a thin slicer... a thick slicer and a shredder.

#### 5 — Juicer

Enough fresh fruit juice for your entire family at one time. Holds 10 full glasses. Plastic strainer allows most nourishing pulp through — no seeds.


#### 3 — Mixer

Motor powered bowl. 3½ quart size. One powerful beater mixes faster than multiple beaters. Bowl is easy to hold in one hand. All around pouring rim.

#### 6 — Sharpener

Keep your knives sharp as new. Sharpens edge only without damaging blade temper. Fast and safe. Uses flexible discs... no hard grinding stone.

Model	Description
200	Power Unit • Mixer • Blender • Sharpener
205	Power Unit • Blender
221	Power Unit Only
171	Mixer
172	Blender
173	Fruit Juicer
174	Knife Sharpener
176	Mixing Bowl
177	Meat Grinder
178	Shredder-Slicer
179	Same as Model 178 minus bowl only

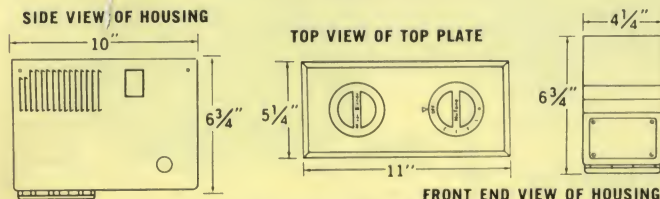

#### SPECIFICATIONS

¼ horsepower motor, 340 watts, 110-120 volts AC. 6 speeds, 16,000 R.P.M. idle. Low speed drive, app. 800 R.P.M. idle. Uses tap field eliminating all complicated centrifugal switches. Stainless steel top, 50/1000" thick. Shipping weight of unit, 17½ lbs. Wiring: Provision should be made for electrical connection during rough wiring, at the proposed location of the power unit, with enough free wire to reach the front of the cabinet, when installed. Follow the Local Electrical Code for 3 amp. load. Unit must be grounded. Dimensions: Size of cut-out 4 5/8" x 10 3/8". Housing assembly 10" long x 4 1/4" wide x 6 3/4" high.

U.S. Pat. Nos. D-180,379; 2,798,700; 2,798,345; 2,917,929.  
Other U.S. and Foreign Patents Pending.

#### NO WASTED SPACE...

Look at the space you save with a NuTone BUILT-IN Food Preparation Center! The recessed motor is completely out of sight to give you much more kitchen work-space. NuTone's multi-matic power drive is ready for instant use with 6 food appliances!

#### NO TANGLED CORDS...

Why clutter your kitchen with a "jungle" of plug-in cords needed for many separate food appliances? Now your counters can be smooth and tidy with the NuTone Built-in Food Center. The stainless steel surface-plate is flush and has recessed controls.

#### NO HEAVY LIFTING...

Storage space is no problem with NuTone's Built-in Food Center. No need to drag heavy appliances in and out of cabinets or crowd your shelves with bulky motors. NuTone's single motor "stores itself" ... and all attachments are light in weight!



1 ... Blender



4 ... Grinder



2 ... Shredder



5 ... Juicer



3 ... Mixer



6 ... Sharpener


# NUTONE

## Bathroom Heaters

U.L. Listed

Quick heat for bathrooms  
when and where needed most

†See Fan Section for Home Ventilating Institute Certified Ratings

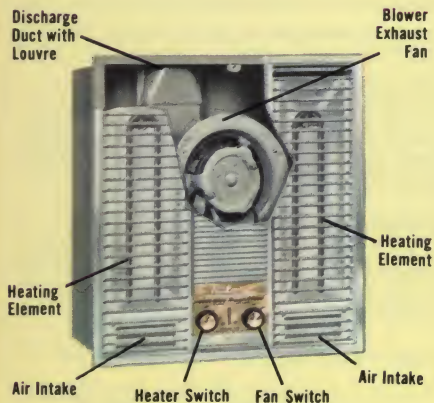


### Heat-A-Vent Model 9300

#### Electric Wall Heater plus Exhaust Fan

Extra durable armored heating elements provide instant heat in two ways... with direct infra-red heat from elements... and with reflected heat. Plug-in connections for fan and heating elements. May be wired to 117 or 234 volts, 60 cycle only. Heater and fan operate at same time or separately. 2 armored heating elements... use both for instant 5460 BTU or single element for 2730 BTU. Blower type exhaust fan... has automatic built-in louver. Satin anodized aluminum grille and reflectors will not rust or tarnish. Special receptacle permits wall light switch to also control the exhaust fan if desired.

U.S. and Foreign Patents Pending

Model	H.V.I. CERTIFIED in square feet		
9300	Kitchen	Bath	Other
	Not used	55	75

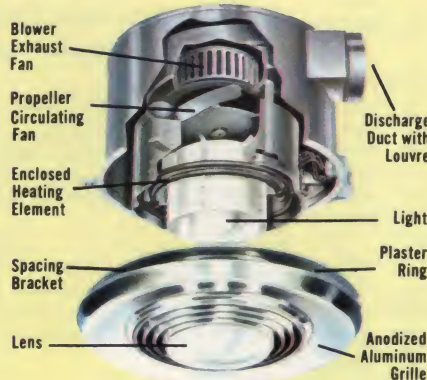


### Heat-A-Vent Lite® Models 9090-9110

#### Ceiling Heater plus Exhaust Fan plus Lighting

... The only Ceiling Fixture of its kind with TWO blades! Propeller for circulating warm air — Blower Wheel to exhaust odors and steam. Exhaust louver automatically closes when the circulating fan for heating is moving. Armored heating element.

Housing — 13½" diameter — 7½" deep. ½" Flange to be flush with plaster. Adjustable Mounting Brackets permit fittings from 0" to ¾" ceiling. Plaster ring hides edges of rough plaster or sheet rock. Spacing bracket on ceiling ring insures correct air intake. Thermal protected. Grille — 16" dia. Motor 60 cycle AC, 115-120 volts. Guaranteed for 5 years. Wall Switch included. Use 100 watt short bulb (not included). U.S. Pat. No. D-166,299

Model	Watts	B.T.U.	Area Heated	H.V.I. CERTIFIED		
9090	1475	5040-5520	450 Cu. Ft.	Not Used	55	75
9110	1800	6160-6640	575 Cu. Ft.	Not used	55	75

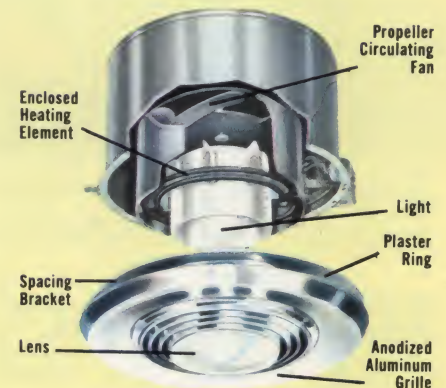

### Heat-A-Lite Model 9010


#### Circulating Heater plus Light

Recirculates warm air usually wasted near ceiling. Improved light pattern gives complete room illumination.

Grille: 16" dia. Housing 13½" dia. x 7½" deep with ½" flange plus adjustable mounting brackets for 0" to ¾" plaster thickness. Extends 3¼" from ceiling.

Plaster ring hides edges of rough plaster or sheet rock. Spacing brackets on ceiling ring insure correct air intake. Thermal protected to prevent overheating.


1475 watts, 5040-5520 BTU, 100 watt bulb. U.S. Pat Nos. 2,689,906; 2,697,163; 569,322; D-166,299

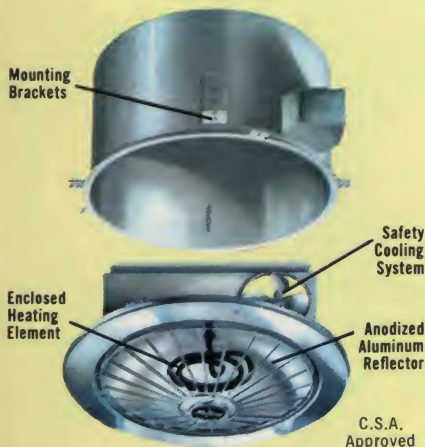

### Radiant Heater Model 9200 — Built-In

The perfect answer to fast, effective, safe bathroom heat. It's healthful infra-red heat spreads relaxing warmth throughout the bathroom. Specially designed arc "bounces" heat in all directions — no nearby scorches — no faraway shivers. Exclusive safety cooling system prevents fire hazard.

Housing — 13½" dia. and 7½" deep. Reflector with outside grille 16¼" dia. 4 adjustable mounting brackets. 1000 watts, 3412 BTU. Guaranteed for one year. U. S. Patent No. 2,708,232 U.S. Pat. No. 2,708,232

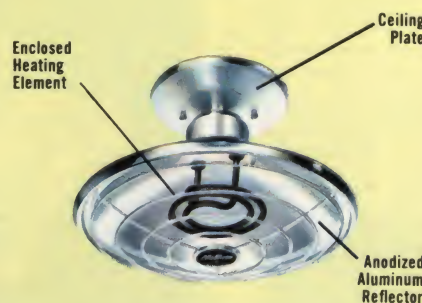


### Radiant Heater Model 9280

#### Surface mounted

Healthful infra-red heat all through the bathroom. Hugs the ceiling. Extends only 8½" from ceiling. Mounts like a standard lighting fixture. Heats 2 ways... with DIRECT HEAT from the element... and with REFLECTED HEAT. Radiates heat ALL THE WAY DOWN to the floor... (not just limited to upper level).

ENCLOSED, Armored Heating Element. Anodized Aluminum Reflector... resists corrosion. Guaranteed not to rust or tarnish. No extra heat bulbs or elements needed. Reflector 13¾" diameter. Ceiling plate 7" diameter. 1000 watts, 3412 BTU. Guaranteed for one year.

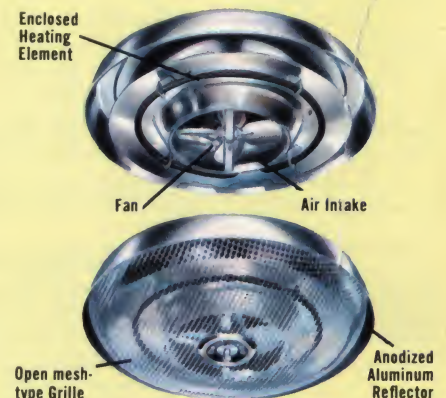

### Radiant Heater Model 9290

#### SURFACE MOUNTED

A new Radiant Ceiling Heater which supplies infra-red heat all the way to the floor — not just upper levels.

Exposed parts are Anodized Aluminum. Will not rust or tarnish. Armored type heating element glows red. Surface mounts to standard junction box. Quiet motor permanent type lubricant. Grille 15" dia. Extends 3½" from ceiling. Thermal protected 1250 watts, 4265 BTU. Heats up to 375 cu. ft. Guaranteed for 1 year. U. S. and Foreign Patents Pending C.S.A. Approved



**ROE 5**

**ELECTRIC RANGE:** 220 volt: Four full sized surface units of 1250 watt Tuttle and Kift monotube burners each with seven position controls. Oven and broiler of 5000 watts with automatic heat control.

**DIMENSIONS:** ROE 5 ELECTRIC — 48" width, 24" depth, 36" height



**ROG 5**

**COMPACT  
WORKING  
KITCHEN**

**GAS RANGE:** Four full size quick heat burners, easily removed for cleaning plus full size oven and broiler, automatic pilot light and adjustable valve for bottled, manufactured and natural gas.

**DIMENSIONS:** ROG 5 GAS — 48" width, 24" depth, 36" height



**RES 4AF**

**ELECTRIC BURNERS:** 110 volt. Has two large 1100 watt Tuttle & Kift burners, giving cooking heat in a matter of seconds. A load limiter device equalizes current on high speeds thus preventing fuse blowouts. Also available with 220 volt burners.


**DIMENSIONS:** Model RES 4AF—ELEC.  
30" width,—24½" depth,—36" height.



**RGS 4AF**

**GAS BURNERS:** Two full sized quick heat Lincoln Brass burners, easily removed for cleaning. With universal valves for bottled, manufactured or natural gas.

**DIMENSIONS:** Model RGS 4AF—GAS  
30" width,—24½" depth,—36" height.

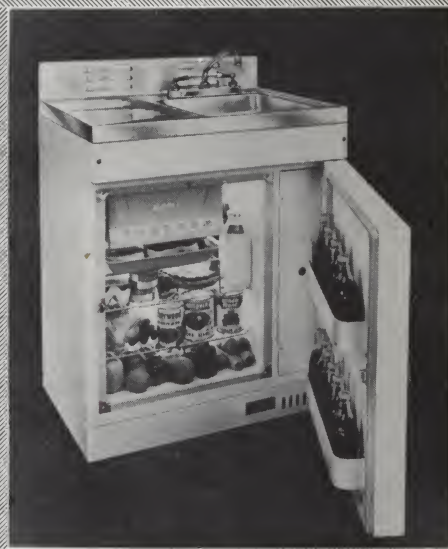

**RS 4AF**

**ACME'S 2 IN 1 KITCHEN** with 2½ Sq. Ft. Working Surface. Here is a kitchen complete with oven, made possible by combining any 20" apartment house range with the Acme Model RS 4AF.

**DIMENSIONS:** Model RS 4AF  
30" width,—24½" depth,—36" height.



## aristocrat HIDE-A-WAY

Available in Mahogany, Walnut and Blond with matching Formica top.

**SAFETY BURNERS:** Two burner HIDE-A-WAY range — 110 volt. Has two large 1100 watt TUTTLE & KIFT burners, giving cooking heat in a matter of seconds. A load limiter device equalizes current on high speeds thus preventing fuse blowouts, plus a safety electric automatic shutoff device.

**SPACIOUS:** A plus 5½ cubic foot large capacity refrigerator, a versatile treasure chest in space and utility. Large 25 lb. horizontal freezer. Inner door shelf.

**VERSATILITY:** Chills, freezes, stores . . . a fresh supply of ice cubes in 56 minutes. No need for the magic lantern and genie . . . just call on the dependable ACME HIDE-A-WAY.

**DIMENSIONS:** 5½ Cu. Ft. Capacity — Height - 36", Shelf Area - 11 sq. ft., Width - 27", Control - 10 point range, Depth - 25½", Light - Automatic internal

## REFRIG-A-BAR

A refrigerator designed to look like a smart piece of furniture. Available in Blond, Mahogany and Walnut with matching Formica top.

**SPACIOUS:** A plus five cubic foot large capacity refrigerator, a versatile treasure chest in space and utility. Large 25 lb. horizontal freezer. Inner door shelf.

REFRIG-A-BAR (5 Cu. Ft. Capacity)

DIMENSIONS: 36" h., 24" w., 23½" d.

## 'Debonair'



A very ingenious piece of furniture with a HIDE-A-WAY range, refrigerator, sink, storage cabinet, and server.

It is ideal for the home, office or den, and fits in with any decor.

**SPECIFICATIONS:** Height of Serving Area: 36"; Overall Width: 39"; Overall Depth: 24"; Overall Height: 42".

**SPACIOUS:** A plus 5½ cubic foot large capacity refrigerator. Large 25 lb. horizontal freezer. 2 inner door shelves. Spacious storage cabinet.

Two burner Hide-A-Way range—110 volt. Large size sink.

Available in black satin, walnut, mahogany and blonde finishes.



RE 5F ELECTRIC



SD 51F

ACME model RE 5F is a range-refrigerator with 2 electric burners.

**ELECTRIC BURNERS:** 110 volt. Has two large 1100 watt Tuttle & Kift burners with seven variable cooking speeds, giving cooking heat in a matter of seconds. A load limiter device equalizes current on high speeds thus preventing fuse blowouts. Also available with 220 volt burners.

**DIMENSIONS:** RE 5F ELECTRIC 27" w., — 25½" d., — 36" h.

**RG 5F GAS** — Same as RE 5F except 4 gas top burners.

ACME model SD 51F "Spa-Saver" refrigerator, over five cubic feet. Large 25 lb. horizontal freezer. Inner door shelf and drip tray. **AUTOMATIC LIGHT** illuminates the entire food compartment when door is open.

**SHELF AREA:** Approximately 11 sq. feet.

**SD 61F**

Same as SD 5F except 6 cu. ft., 27" W., 24½" D., 34½" H.

**ACME**  
**REFRIG-ORANGE**

WEST COAST DISTRIBUTORS:

**RINSON DISTRIBUTORS, INC.**

1025 NORTH HIGHLAND AVE. • LOS ANGELES 38, CALIF. • HOLLYWOOD 3-2371



a r i

SAFETY BU  
TUTTLE & P  
equalizes cu  
matic shutof

SPACIOUS: A  
and utility. L

VERSATILITY  
for the magi

DIMENSIONS

Digitized by



ASSOCIATION  
FOR  
PRESERVATION  
TECHNOLOGY,  
INTERNATIONAL

[www.apti.org](http://www.apti.org)

BUILDING  
TECHNOLOGY  
HERITAGE  
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Mike Jackson, FAIA

SPECIFICATIONS:  
Overall Depth: 24

SPACIOUS: A plus 5½ cubic foot large capacity refrigerator. Large 25 lb. horizontal freezer. 2 inner door shelves. Spacious storage cabinet.

Two burner Hide-A-Way range—110 volt. Large size sink.

Available in black satin, walnut, mahogany and blonde finishes.

A-BAR

ed to look like a  
ture. Available in  
nd Walnut with

e cubic foot large  
versatile treasure  
ility. Large 25 lb.  
r door shelf.

i. Ft. Capacity)

24" w., 23½" d.

odel RE 5F is a range-re  
r with 2 electric burners.

C BURNERS: 110 volt.  
large 1100 watt Tuttle  
urners with seven vari-  
king speeds, giving cook-  
in a matter of seconds.  
limiter device equalizes  
n high speeds thus pre-  
se blowouts. Also avail-  
220 volt burner.

IONS: RE 5F ELECTRIC  
— 25½" d., — 36" h.

IAS — Same as RE 5F  
gas top burners.

del SD 51F "Spa-Saver"  
r, over five cubic feet.  
lb. horiz al freezer.  
r shelf a, drip tray.  
IC LIGH illuminates  
ood comp ment when  
on.

EA: Approximately 11

SD 61F  
Same as SD 5F except 6 cu. ft.,  
27" W., 24½" D., 34½" H.

SD 51F



WEST COAST DISTRIBUTORS:

RINSON DISTRIBUTORS, INC.

1025 NORTH HIGHLAND AVE. • LOS ANGELES 38, CALIF. • HOLLYWOOD 3-2371